


ET6500 Thin Client Series

ET6500x - Flexible, DUAL-Video ready, highest-performance terminal includes industry-standard Microsoft XP Embedded operating system, with the latest Windows technologies; Microsoft RDP and Citrix ICA protocol to access Windows applications and for VDI access; multiple terminal emulations to access mainframe, midrange, UNIX, and other legacy applications; Internet Explorer browser to access Web-based applications, with Windows Media Player for multimedia and Microsoft Java Virtual Machine (JVM); support for the full Win32 API, as well as Windows XP Professional device drivers and development tools, and many third-party device drivers, to facilitate rapid creation, integration and porting of local applications

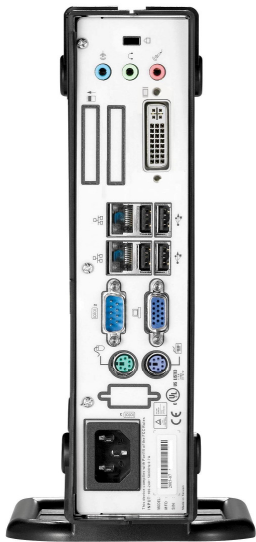

Features:

- Integrated VGA and DVI video ports – No video splitter cable needed
- Small footprint and internal power supply to reduce clutter and ease installation and use
- Highest-performance CPU and multiple simultaneous session support provides increased speed and productivity
- Dual 10/100 BaseT Fast Ethernet, six USB, keyboard and mouse PS/2 ports, audio ports, Serial port provide the connectivity you need
- Sturdy metal enclosure, and no fan or other moving parts for quiet operation and high reliability
- Broad application compatibility and system integration, improving user productivity
- Seamless, centralized management with bundled CLI SNMP Administrator software, including remote shadowing and asset tracking to give administrators complete control of all CLI desktops, dramatically reducing support costs
- Special builds available via download such as Kiosk, .Net, Firefox, IE7, Sun Java JVM/JRE, MS Office Viewers and others
- Multiple imaging options including SNMPAdm management software, USB stick, FTP and HTTP
- Lower total cost of ownership (TCO) than PCs or other computing products



CLI ET6500 Thin Client Series

Hardware Specifications

Model	ET6500x (V2 model)			
CPU	<ul style="list-style-type: none"> Via C7 Eden 1.0GHz 			
Flash memory	<ul style="list-style-type: none"> 512MB, expandable to 2GB 			
DRAM	<ul style="list-style-type: none"> 512MB, expandable to 1GB 			
Network	<ul style="list-style-type: none"> Dual Auto-sense 10/100BaseT twisted-pair Ethernet, RJ-45 connector, Wake-On-LAN Optional 802.11b/g adapter 			
I/O ports	<ul style="list-style-type: none"> Six Type A USB 2.0 One serial DB-9 RS-232C up to 115.2K baud 	<ul style="list-style-type: none"> One PS/2 mini-DIN keyboard 	<ul style="list-style-type: none"> One PS/2 mini-DIN mouse 	
Video	<ul style="list-style-type: none"> One integrated DVI-D video port One integrated VGA video port Resolution up to 1920x1080 including WideScreen support Up to 32-bit color (16.7 million colors + alpha channel) Up to 85 Hz refresh rate, flicker free 			
Audio	<ul style="list-style-type: none"> Full 16 bit stereo FM synthesis, stereo line-out, line-in, 8-bit mini microphone line-in 			
Physical specifications	<ul style="list-style-type: none"> Dimensions: 2.4 in (W) x 8.9 in (D) x 9.5 in (H) Built-in Kensington Security Slot (Cable not included) 	<ul style="list-style-type: none"> Weight: 3.3 lb 	<ul style="list-style-type: none"> Metal enclosure 	
Environment	<ul style="list-style-type: none"> Operating temperature: 5°C to 35°C (41°F to 95°F), Storage temperature: -40°C to 60°C (-41°F to 140°F) Relative humidity: 20% to 80% non-condensing Power requirements: 100-240 VAC, 50/60 Hz, internal power supply Convection cooling, no fan 			
Regulatory compliance	<ul style="list-style-type: none"> FCC Class B 	<ul style="list-style-type: none"> UL 	<ul style="list-style-type: none"> CE Mark 	<ul style="list-style-type: none"> TÜV

Software Specifications

Model	ET6500x
Local Operating System	<ul style="list-style-type: none"> Microsoft Windows XP Embedded SP2
RDP	<ul style="list-style-type: none"> Microsoft RDP 5.5, including port redirect and session auto reconnection
ICA	<ul style="list-style-type: none"> Citrix ICA 9 (ICA 10 available upon request)
Terminal emulations	<ul style="list-style-type: none"> IBM TN5250e, TN3270e, 3151 DEC VT-100, VT-220, VT-320, VT-420, ANSI BBS, SCO Console Wyse WY-50, WY-60
Web browser	<ul style="list-style-type: none"> Internet Explorer 6, including Flash and Shockwave playback, Privacy enhancements and P3P support, Image Toolbar, Adobe PDF file viewer, MSJVM, Windows Media Player (IE7 available upon request)
Email client	<ul style="list-style-type: none"> Outlook Express
Other features	<ul style="list-style-type: none"> ThinPrint available via download Supports optional Castles Technology EZ100 external smart card reader via serial or USB Special builds available via download such as Kiosk, .Net, Firefox, IE7, Sun Java JVM/JRE, MS Office Viewers and others Customer installed local application support Multiple imaging options including SNMPAdm management software, USB stick, FTP and HTTP
Enhanced printing capability	<ul style="list-style-type: none"> LPD / LPR
Remote configuration / management	<ul style="list-style-type: none"> DHCP, SNMP, FTP CLI SNMP Administrator software, including configuration and image updates, shadowing, asset management
Server Operating System compatibility / support	<ul style="list-style-type: none"> Microsoft Windows Server 2003, Windows 2000 Server, and Windows NT 4.0, Terminal Server Edition; Terminal Services Citrix® Application Delivery Infrastructure, Access Suite™ / Platform, MetaFrame®, Presentation Server™, WinFrame®, DDI VMware Virtual Desktop Infrastructure (VDI) UNIX, Linux IBM OS/400, i5/OS, OS/390, z/OS
Languages	<ul style="list-style-type: none"> English (US and UK), Italian, French, Canadian French, Chinese, Austrian / German, Scandinavian, Spanish, Japanese / Kana, Korean
Network file transfer protocols	<ul style="list-style-type: none"> TCP/IP with DNS and PPP PXE

